SOLENOID DOSING SYSTEM PUMP
KemiDose Series

The **KemiDose** Display is a professional pump suitable for use in Water Treatment markets.





FEATURES

- IP 65 Level Protection
- Alphanumeric Display
- Wheel holder mounted on ball bearing, for a longer pump life
- New motors with extended life time
- Snap on transparent cover
- Two roller PTFE body, for a more proportional dosing and an extended lifetime

TECHNICALCHARACTERISTICS


- **FLOW RATES**
  - 5 l/h
- **BACK PRESSURE**
  - 5 bar
- **POWER SUPPLY**
  - 230÷Vac - 50/60 Hz - 20,5 W with galvanized insulation
- **MATERIALS**
  - **ENCLOSURE**: ABS with fiber glass
  - **PUMP HEAD**: PVDF
- **DOSING**
  - proportional mode
- **MOTORS**
  - Solenoid coil
- **MEASURE**
  - 0 ÷14 pH measure
  - 0 ÷1000 Redox measure
  - 0 – 5 ppm Free Chlorine
- **FUNCTIONS**
  - Proportional dosing by feedback measure
  - Complete regulation for a pool with Boiler and Circulation pump activation.


PUMP KEY CODE


1	Kemi Series						
	2	Model: Dose, Master					
		3-4	Measure: pH, MV, CL				
			5-6	Pressure: 0H=0,5 Bar, 1H= 1,5Bar, 20= 2 Bar			
				7-8	Flowrate: 0H=0,5 L/H, 1H= 1,5L7H, 20= 2 L/H		
					9	Power Supply: A= 220 Vac	
						10	Option
						11-12	Free
K	D	PR	1H	1H	A	0	00

DIMENSIONS

Single

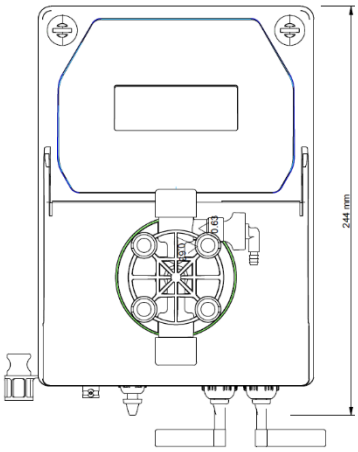

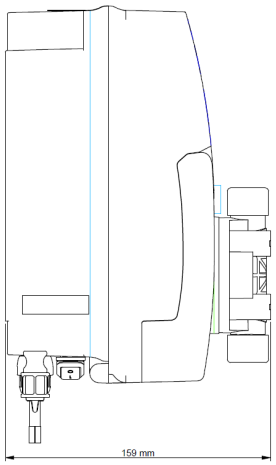



Double and Triple

